
adaptalift GROUP

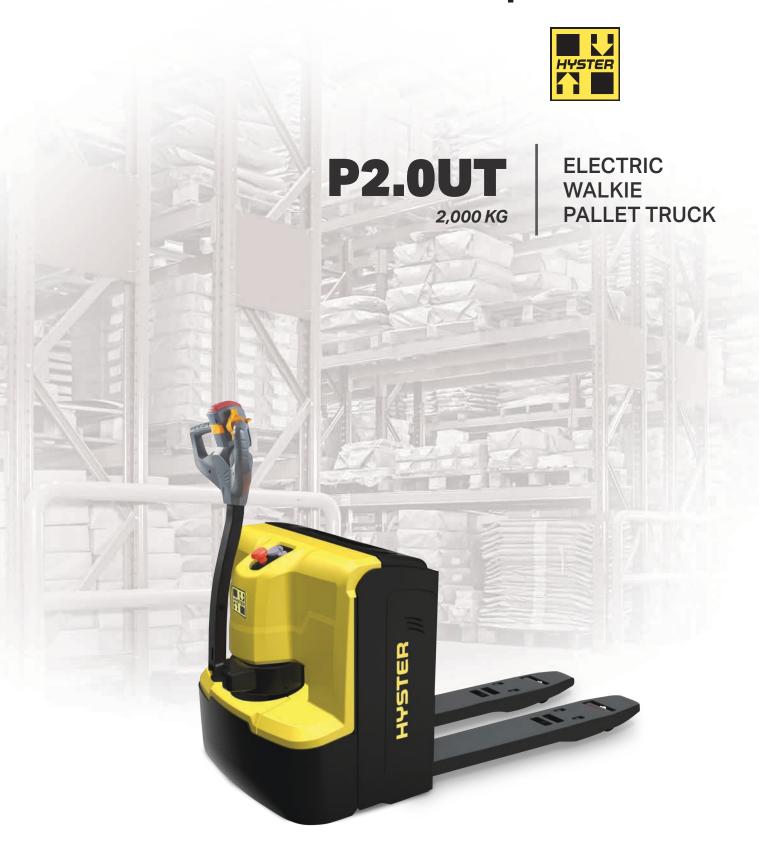

THE SOLUTION TO YOUR APPLICATION NEEDS

13 22 54 aalhysterforklifts.com.au

OVERVIEW

The Hyster electric walkie pallet truck P2.0UT combines ergonomic features and reliable performance with energy efficient technology. The low-maintenance helps increase productivity and reduce operational costs.

Productivity

- Advanced AC control system eliminates the motor brushes, which limits maintenance requirements
- ✓ Low skirting on main chassis
- Side battery roll-out system is very convenient to replace batteries
- Built-in pressure relief valve protects the trucks from overloading
- **Emergency power disconnect switch**
- ✓ Long handle reduces steering effort
- Emergency reversing system in handle
- **✓** Low speed switch in the handle
- ✓ Variable speed control
- Cold store configuration (option)

Optimum Structural Design

- Spring-loaded casters improve lateral stability on uneven floors and enhance truck performance and service life
- Formed heavy gauge steel provides maximum fork strength and longevity
- Pull rod design protects against bending
- **☑** Durable plastic covers

Serviceability

- CANbus technology reduces wiring complexity
- ✓ Low battery protection setting extends the battery life
- All pivot points have grease fittings and serviceable bushing, reducing component wear



Handle (Standard) (Left & Right Handed)





Entry roller for easy operation

ADAPTALIFT GROUP

adaptalift GROUP

SPECIFICATIONS AND DIMENSIONS





MODEL	MEASUREMENT	P2.0UT
Load capacity/rated load	Q (kg)	2000
Load centre distance	c (mm)	600
Load distance, centre of drive axle to fork	x (mm)	815/865/935
Fork height, lowered	h13 (mm)	82
Tyre size, front	mm	ф250х70
Tyre size, rear	mm	ф82х126 (98)
Additional wheels (dimensions)	mm	φ127x57
Wheels, number front rear (x=driven wheels)		1X+2/2 (4)
Max. Lift height	h3 (mm)	202
Height of tiller in drive position min./max.	h14 (mm)	780/1230
Overall length	l1 (mm)	1655/1705/1775
Length to face of forks	l2 (mm)	555
Overall width	b1 (mm)	775
Fork dimensions	s/e/I (mm)	54x180x1100/1150/1220
Width overall forks	b5 (mm)	520/550/650/685
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2015/2065/2135
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2115/2115/2135
Turning radius	Wa (mm)	1400/1450/1520
Travel speed, laden/unladen	Km/h	5.5/5.6
Battery voltage, nominal capacity K5	V/Ah	24/210
Battery weight	Kg	196
Battery box dimensions	mm	750x170x534
Service weight (with battery)	Kg	640-645

P2.0UT Power Plug Type









Branches

VICTORIA

Melbourne - Springvale (Head Office)

1574 Centre Rd Springvale, VIC, 3171

(03) 9547 8000

Melbourne - Truganina

42–44 Jessica Way
 Truganina, VIC, 3029
 [03] 9394 4090

TASMANIA

Spreyton

87a Devonport Road Spreyton, TAS, 7310[03] 6427 3966

NEW SOUTH WALES

Sydney (State Office)

219 Newton RdWetherill Park, NSW, 2164[02] 8788 1777

Riverina

5 Favell StreetGriffith, NSW, 2680[02] 6962 7343

Port Kembla

20-26 Flinders Street Port Kembla, NSW, 250513 22 54

QUEENSLAND

Brisbane (State Office)

11 Lombank Street
 Acacia Ridge, QLD, 4110
 [07] 3373 5111

Rockhampton

© 62 Glenmore Road Park Avenue, Rockhampton QLD 4701

([07] 4922 8874

Townsville

39 Duckworth Street Garbutt, QLD, 4814[07] 4778 2000

SOUTH AUSTRALIA/ NORTHERN TERRITORY

Adelaide (State Office)

18-22 Churchill Rd. Nth.
 Dry Creek, SA, 5094
 [08] 8360 3444

Mt Gambier

**** 13 22 54

WESTERN AUSTRALIA

Perth (State Office)

Unit 1, 1-9 Kurnall Road Welshpool, WA, 6106[08] 9352 9200

Karratha

Lot 3873-Pemberton Road Karratha, WA, 671413 22 54

Service Centres

VICTORIA

Bendigo Warrnambool Ballarat Shepparton Wondonga Mildura

TASMANIA

Hobart Launceston Burnie

NEW SOUTH WALES

Dubbo
Griffith
Tamworth
Newcastle
Wollongong
Canberra
Tumut
Bathurst
Wagga Wagga
Albury
Gosford
Coffs Harbour

QUEENSLAND

Rockhampton Mackay Cairns Gladstone Townsville Mt Isa Toowoomba Gold Coast Sunshine Coast

SOUTH AUSTRALIA/NT

Riverland Darwin

WESTERN AUSTRALIA

Margaret River



13 22 54

aalhysterforklifts.com.au