
adaptalift GROUP

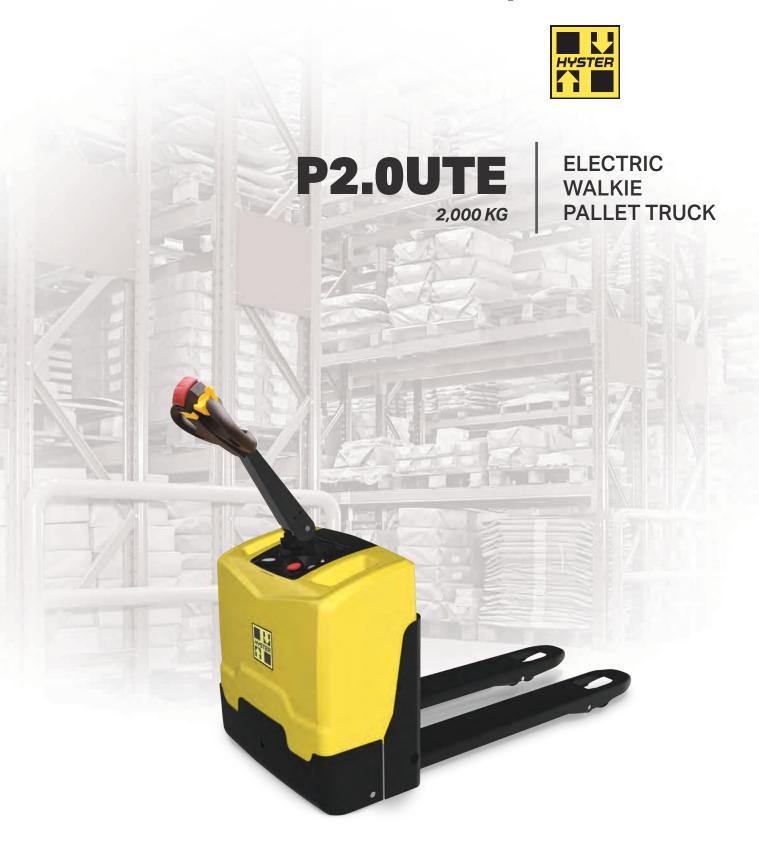

THE SOLUTION TO YOUR APPLICATION NEEDS

13 22 54 aalhysterforklifts.com.au

OVERVIEW

The Hyster® electric walkie pallet truck P2.0UTE combines ergonomic features and reliable performance with energy efficient technology. The low-maintenance helps increase productivity and reduce operational costs.

Standard Features

- ☑ Brushless maintenance free AC motor.
- **✓** Sealed maintenance free batteries
- Small turning radius 1335mm-1405mm (width 520/550/685mm)
- Self-adjusting caster wheels
- Drive capability when tiller is upright, greatly reducing turning space
- Tiller head with max. speed limit button
- Emergency stop and belly button
- Casters to increase stability
- **Exit roller**
- **☑** BDI and hour meter
- Built-in charger

Options

- **E**xternal charger
- Various fork widths and lengths available



Handle (Standard) (Left & Right Handed)




Entry roller for easy operation


TURNING RADIUS

The P2.0UTE has a small turning radius. When switched to low speed it adapts to narrow spaces. Ideal for shipping containers and tail gate applications.

MINI Type Pallet Truck





Hand Pallet Truck



adaptalift GROUP

SPECIFICATIONS AND DIMENSIONS





MODEL	MEASUREMENT	P2.OUTE
Load capacity	Q (kg)	2000
Load centre distance	c (mm)	600
Fork height, lowered	h13 (mm)	85 / 75
Tyre size, front	mm	φ195x70
Tyre size, rear (single)	mm	Φ80x93 /φ74x93
Tyre size, rear (double)	mm	φ80x70 /φ74x70
Wheels number front rear (x = driven wheels)		1X-2/4
Max. lift height	h3 (mm)	190/180
Height of tiller in drive position min./max.	h14 (mm)	950/1310
Overall length	I1 (mm)	1525/1595
Length to face of forks	I2 (mm)	375
Overall width	b1 (mm)	685
Fork dimensions	s/e/l (mm)	53/160/1150 (1220)
Width overall forks	b5 (mm)	520/550/685
Aisle width for pallets 1000x1200 (1200 crossways)	Ast (mm)	1725/1795
Aisle width for pallets 800x1200 (1200 lengthways)	Ast (mm)	1775/1795
Turning radius	Wa (mm)	1335/1405
Travel speed, laden/unladen	Km/h	4/4.5
Battery voltage/nominal capacity K20	V/Ah	24/105
Battery dimensions I/w/h	mm	260/169/215
Battery weight	Kg	49
Service weight (with battery)	Kg	250

P2.0UTE Power Plug Type









Branches

VICTORIA

Melbourne - Springvale (Head Office)

1574 Centre RdSpringvale, VIC, 3171[03] 9547 8000

Melbourne - Truganina

42–44 Jessica Way Truganina, VIC, 3029 [03] 9394 4090

TASMANIA

Sprevton

87a Devonport Road Spreyton, TAS, 7310[03] 6427 3966

NEW SOUTH WALES

Sydney (State Office)

219 Newton RdWetherill Park, NSW, 2164[02] 8788 1777

Riverina

5 Favell StreetGriffith, NSW, 2680[02] 6962 7343

Port Kembla

20-26 Flinders Street
 Port Kembla, NSW, 2505
 13 22 54

QUEENSLAND

Brisbane (State Office)

11 Lombank Street
 Acacia Ridge, QLD, 4110
 [07] 3373 5111

Rockhampton

© 62 Glenmore Road Park Avenue, Rockhampton QLD 4701

([07] 4922 8874

Townsville

39 Duckworth Street Garbutt, QLD, 4814[07] 4778 2000

SOUTH AUSTRALIA/ NORTHERN TERRITORY

Adelaide (State Office)

18-22 Churchill Rd. Nth.
 Dry Creek, SA, 5094
 [08] 8360 3444

Mt Gambier

**** 13 22 54

WESTERN AUSTRALIA

Perth (State Office)

Unit 1, 1-9 Kurnall Road Welshpool, WA, 6106[08] 9352 9200

Karratha

Lot 3873-Pemberton Road Karratha, WA, 671413 22 54

Service Centres

VICTORIA

Bendigo Warrnambool Ballarat Shepparton Wondonga Mildura

TASMANIA

Hobart Launceston Burnie

NEW SOUTH WALES

Dubbo
Griffith
Tamworth
Newcastle
Wollongong
Canberra
Tumut
Bathurst
Wagga Wagga
Albury
Gosford
Coffs Harbour

QUEENSLAND

Rockhampton Mackay Cairns Gladstone Townsville Mt Isa Toowoomba Gold Coast Sunshine Coast

SOUTH AUSTRALIA/NT

Riverland Darwin

WESTERN AUSTRALIA

Margaret River



13 22 54 aalhysterforklifts.com.au